

LZS Flowmeter

Features:

1. One-piece injection-molded heat and chemical resistant polysulfone meter body.
2. Compact height for tight installations.
3. Extended height for longer, easy to read scale.
4. Not recommended for direct sunlight applications.
5. Available for liquid.




| LZS Flowmeter | | |
|----------------------|--|-------------------------|
| Model | Measuring range (m³/h) | Unit price (USD) |
| LZS-20(1) Union | 0.016-0.16 | 13 |
| LZS-20(2) Union | 0.060-0.60 | 15 |
| LZS-32(1) Union | 0.16-1.6 | 18 |
| LZS-32(2) Union | 0.25-2.5 | 20 |
| LZS-40 Union | 0.4-4 | 39 |
| LZS-63(1) Union | 0.4-4 | 42 |
| LZS-63(2) Union | 0.6-6 | 44 |
| LZS-63(3) Union | 1.0-10 | 47 |
| LZS-63(4) Union | 1.6-16 | 60 |
| LZS-75(1) Union | 1.0-10 | 117 |
| LZS-75(2) Union | 8-40 | 130 |
| LZS-75(3) Union | 12-60 | 146 |
| LZS-110(1) Flange | 14-90 | 365 |
| LZS-110(2) Flange | 18-120 | 391 |
| LZS-140(1) Flange | 25-150 | 443 |
| LZS-140(2) Flange | 25-180 | 469 |

Dongguan Wellsource Water Treatment Co.Ltd

Panel Type Flow meter



| No | Name | Flow | Flow | Material | Inlet/Outlet nozzle |
|----|-------|--------|-------|---------------|---------------------|
| | | (LPM) | (GPM) | | (DN) |
| 1 | 2GPM | 1-7 | 0.2-2 | organic glass | 20 |
| 2 | 5GPM | 2-18 | 1-5 | organic glass | 20 |
| 3 | 10GPM | 5-35 | 1-10 | organic glass | 32 |
| 4 | 20GPM | 10-70 | 2-20 | organic glass | 32 |
| 5 | 35GPM | 12-120 | 4-35 | organic glass | 32 |
| 6 | 40GPM | 15-150 | 4-40 | organic glass | 32 |
| 7 | 50GPM | 40-180 | 10-50 | organic glass | 32 |

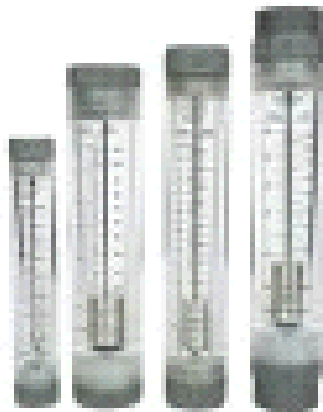

Tube Type Flow meter

Dongguan Wellsource Water Treatment Co.Ltd

| No | Name | Flow | Flow | Material | Inlet/Outlet nozzle |
|-----------|-------------|--------------|--------------|----------------------|----------------------------|
| | | (LPM) | (GPM) | | (DN) |
| 1 | 1GPM | 0.4-4 | 0.1-1 | organic glass,Arylic | 20 |
| 2 | 2GPM | 1-7 | 0.2-2 | organic glass | 20 |
| 3 | 5GPM | 2-18 | 1-5 | organic glass | 20 |
| 4 | 10GPM | 5-35 | 1-10 | organic glass | 32 |
| 5 | 16GPM | 10-60 | 2-16 | organic glass | 32 |
| 6 | 20GPM | 10-70 | 2-20 | organic glass | 32 |
| 7 | 35GPM | 15-120 | 4-35 | organic glass | 32 |
| 8 | 40GPM | 15-150 | 4-40 | organic glass | 32 |
| 9 | 60GPM | 20-240 | 6-60 | organic glass | 50 |
| 10 | 100GPM | 50-350 | 10-100 | organic glass | 50 |
| 11 | 150GPM | 50-500 | 15-150 | organic glass | 63 |

This flowmeter is mainly applied to form a complete set in clean water treatment and environmental protection projects. It also can be used in chemical industry, petroleum, light industry, medicine, fertilizer, food, papermaking and scientific research, etc., to measure the single-phase non-pulsing flow of liquid and gas.