

# Dongguan Wellsource Water Treatment Co.Ltd

---



## Single Tank Filter Valve

- 1.It is the same size between outlet of sewage discharge and in-out flow of water.
- 2.It is suitable for use of filter of sand,filter of carbon and filter of oxygen.
- 3.The sealing for the core of planar valve adopts ceramic non-wear type and guarantees reliable usage.
- 4.It is easy to be installed and adjusted and needs no operation from the user.


No.	Model	Video Model	Function	Inlet /Outlet	Distributor pilot	Control Mode		Flow rate (m3/h)	Package
						Flow	Time		Carton
1	GL2A	LED	Filtration	3/4 inch	3/4 inch	Dual Control Model		1-3	12EA/CTN
2	GL2B	LCD	Filtration	3/4 inch	3/4 inch	Dual Control Model		1-3	12EA/CTN
3	GL4	LED	Filtration	1 inch	1 inch	Dual Control Model		3-6	9EA/CTN
4	GL10	LCD	Filtration	1.5 inch	1.5 inch	Dual Control Model		8-12	1EA/CTN

## Single Tank Counter-current Softener Valve

- 1.It adopts the backflow regeneration controlling principle of floating bed:The quality of water is high whereas the consumption of salt is low:
- 2.No hard water runs through the equipment for the industrial type.It is suitable in some situations where the requirements for the quality of water are high,such as boilers.
- 3..The sealing for the core of planar valve adopts ceramic non-wear type and guarantees reliable usage.
- 4.The Chinese(or English)operating interface shows the instant and accumulated amount of water.
- 5.There are two modes to choose from:full-flow pattern and time mode.It has the memory function of cutting off the electricity and water.
- 6.It is easy to be installed and adjusted and needs no operation from the user.
- 7.It can be forced to be set regeneration time of day in flow pattern.

# Dongguan Wellsource Water Treatment Co.Ltd

NO.	Model	Video Model	Function	Inlet /Outlet	Distributor pilot	Control Mode		Flow rate (m3/h)	Package	Remark
						Flow	Time			
1	DR2A	LED	Soften	3/4 inch	3/4 inch	Dual Control Model		1-3	9EA/CTN	434Brine Valve
2	DR2B	LCD	Soften	3/4 inch	3/4 inch	Dual Control Model		1-3	9EA/CTN	434Brine Valve
3	DR4A	LED	Soften	1 inch	1 inch	Dual Control Model		3-6	9EA/CTN	434Brine Valve
4	DR4B	LCD	Soften	1 inch	1 inch	Dual Control Model		3-6	9EA/CTN	434Brine Valve
5	DR10	LCD	Soften	1.5 inch	1.5 inch	Dual Control Model		8-12	1EA/CTN	454Brine Valve

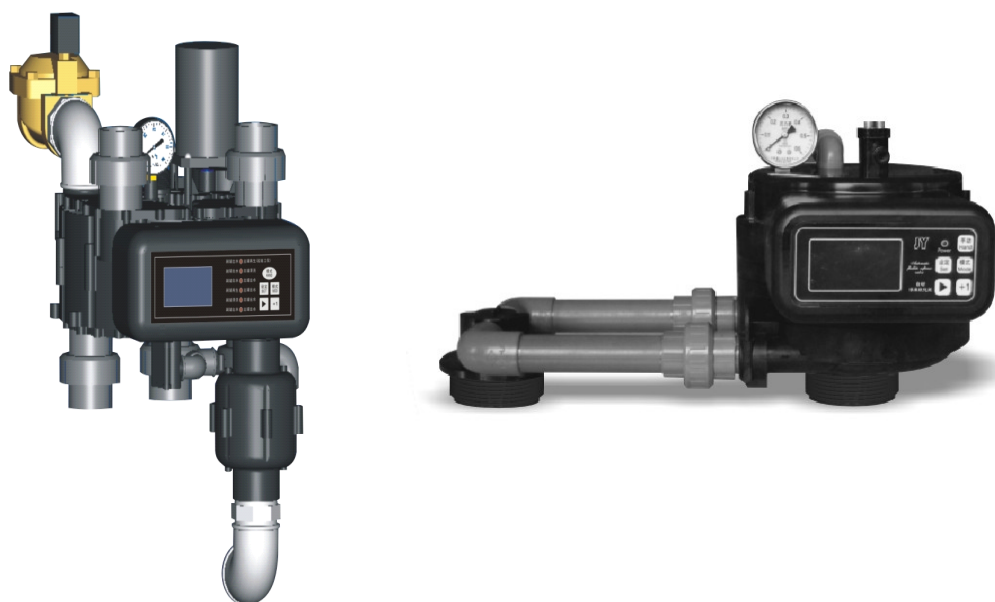

## Dual Tank Counter-current Softener Valve

1. It adopts floating bed controlling principle;Two tanks recycle and produce water alternatively;The diameter of the swap tank is small and the loading amount of resin is small.
2. The components of the planar multiple unit valves use high-strength materials is the molding process;The ceramic non-wear sealing method is adopted inside the valve;
3. Floe transmitters of both salty water and softened water are adopted;The periodical amount of water production and that of brine water production is set according to the hardness of raw water;

# Dongguan Wellsource Water Treatment Co.Ltd

---

4. The equipment can coordinate with the liquid level switch and turn itself on and off automatically;It needs no operation from the users;
5. Controller's humanizing operating interface in Chinese(English)displays different kinds of parameters;It can also turn off the electricity and water,and conduct consumption;

NO.	Model	Video Model	Inlet /Outlet	Control Mode		Flow	Package
				Flow	Time	m <sup>3</sup> /h	
1	ZR4	Digital	1 inch	Dual Control Model		1-6	1EA/CTN
2	RF20	Digital	1.5 inch	Dual Control Model		10-15	1EA/CTN
				Dual Control Model		20-25	1EA/CTN
3	RF50	Digital	2.5 inch	Dual Control Model		30	1EA/CTN
		Digital		Dual Control Model		40-50	1EA/CTN

## Dual Tank Counter-current Control Valve with Timer & Totalizer

NO.	Model	Video Model	Inlet /Outlet	Control Mode		Package
				Flow	Time	
1	10-15T/H control	Digital	1 inch	Dual Control Model		1EA/CTN
2	20-25T/H control	Digital	1.5 inch	Dual Control Model		1EA/CTN
3	30T/H control	Digital	2 inch	Dual Control Model		1EA/CTN
4	40-50T/H control	Digital	2.5 inch	Dual Control Model		1EA/CTN